



- 2.8" LED Status Display
- Echo and Reverb Effectors
- Digital Key Controller
- 4K HDMI 2.0 3 Inputs & 1 Output
- Microphone Feedback Eliminator
- 7 Bands Microphone Equalizer
- Dual UHF 900Mhz Wireless Microphones
- Music Volume Initial & Limit Setting
- 7 Bands Music Equalizer
- BLUETOOTH
- Net Weight 5.3 kg
- Universal Power Input 100V~240V


**AM-2350**

Acesonic USA Inc.  
161 S. 8th Ave.  
City of Industry, CA 91746


888.976.7464  
SALES@ACESONIC.COM  
WWW.ACESONIC.COM

**1400-Watts, Dual Wireless Microphones, 4K HD, Bluetooth, Mixing Amplifier**

**FRONT PANEL**

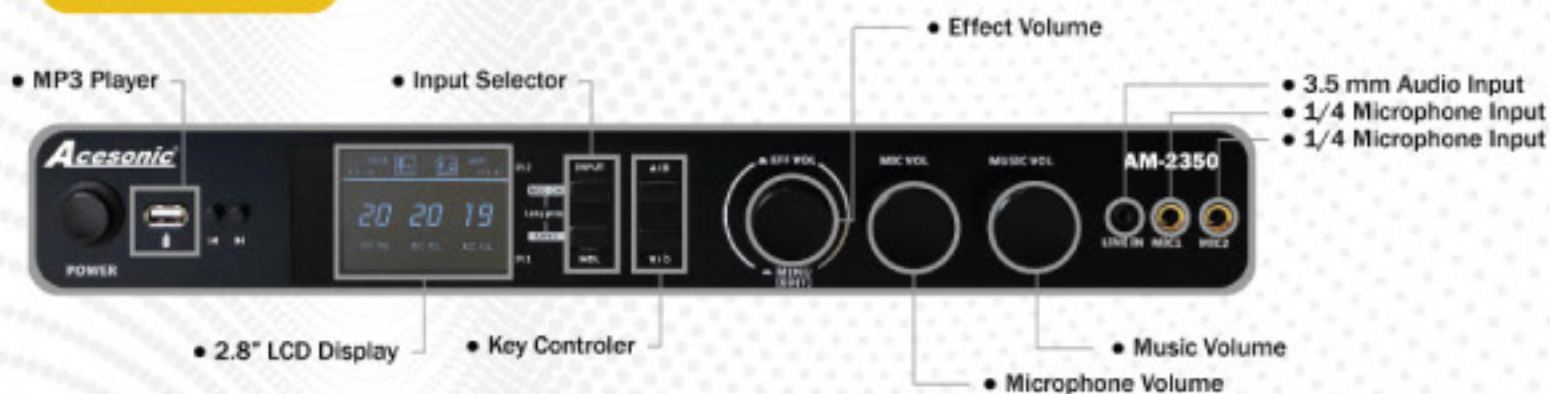

**BACK PANEL**

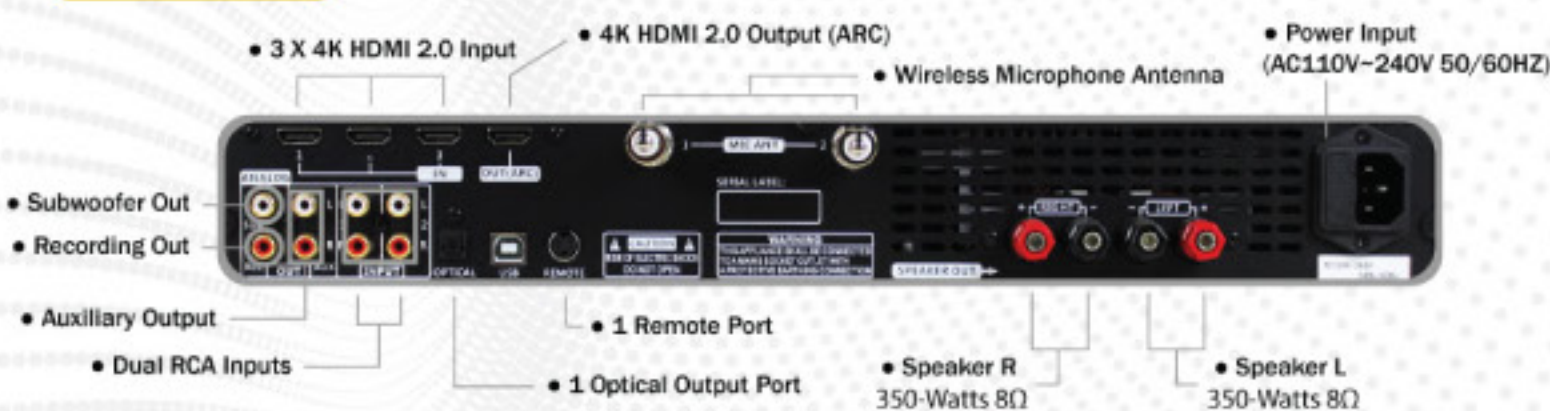

**Specification:**

- Output Power: 350 Watts RMS x 2 @ 8Ω, Total 700 Watts RMS Output  
Total 1400 Watts Max Output @ 8Ω
- Frequency Response: 20Hz-20kHz (±0.5dB)
- Total Harmonic Distortion: <0.04%
- Signal to Noise Ratio >98dB
- Net weight 11.7 LB / 5.3 KG
- AC Input (100V~240V 50/60Hz) Worldwide Compatible
- Includes Remote Controller

**Connectors:**

- Dual 1/4" Microphone Inputs
- 3 x 4K HDMI 2.0 Inputs
- 1 x 4K HDMI 2.0 Output (ARC)
- 2 x Analog Audio RCA Inputs
- 1 x Analog Audio RCA Output
- 1 X Subwoofer Output
- 1 X Recording Output
- 1 USB Input Port for Configuration
- 1 Optical Input
- 1 USB MP3 Player Input
- 1 Remote Control Port
- 1 Front 3.5mm Audio Input
- Bluetooth Input



**Assembled in China**  
**Designed by Acesonic in USA**

**AM-2350**

Acesonic USA Inc.  
161 S. 8th Ave.  
City of Industry, CA 91746

888.976.7464  
SALES@ACESONIC.COM  
WWW.ACESONIC.COM